

TECHNICAL DATA SHEET

INGENIO ECS

60 – 80 – 100 – 125 – 160 kVA

3-Ph (IN) / 3-Ph (OUT)

Rev.	Descrizione Description	Data Date	Emesso Issued	Approvato Approved	Lingua Language	Pagina Page	di Pag. of Pag.
A	First Issue	23.03.18	R. Soldani	G. Senesio	I	1	8
					Codice / Code		
					OMS68006		


GENERAL INFORMATION

POWER		kVA	60	80	100	125	160
UPS type			ON LINE - Double Conversion				
Rated apparent output power (cos φ = 1)		kVA	60	80	100	125	160
Rated active output power (cos φ = 1)		kW	60	80	100	125	160
Rated active power according to EN 50171		kW	50	67	83	104	133
AC/AC efficiency (VFI - ON LINE Double Conversion)	@ 25% load	%	93,0	93,0	93,0	93,0	93,0
	@ 50% load		94,5	94,5	94,5	94,5	94,5
	@ 75% load		95,0	95,0	95,0	95,0	95,0
	@ 100% load		≥ 95	95,0	95,0	95,0	95,0
AC/AC efficiency (VFD ECO MODE - from 50% of load)		%	≥ 98,0				
Heat dissipation at rated load, VFI mode (cos φ = 1)		kW	3,2	4,2	5,3	6,6	8,4
Ambient temperature	UPS BATTERY	° C	0 ÷ 40 0 ÷ 25				
Storage temperature	UPS BATTERY	° C	-10 ÷ 70 -10 ÷ 60				
Relative humidity (non condensing)		%	< 95				
Altitude		m	< 1000 (above sea level)				
Power derating for altitude > 1000 m			According to EN 62040-3 0,5% every 100 m				
Cooling			Forced				
Required cooling air volume		m ³ /h	1000	1000	1200	1200	1500
Acoustic noise (according to EN 62040-3)		dB	< 60				
Number of cells for standard Lead acid battery			360 ÷ 372				
Protection degree			IP20				
Electromagnetic compatibility			According to EN 62040-2 (CE marking)				
Safety			According to EN 62040-1				
Test and performance			According to EN 62040-3				
Colour			RAL 9005 (altri su richiesta)				
Accessibility			Front and side access				
Installation			Against the wall				
Overall dimension	W	mm	560				
	D		940				
	H		1800				
Weight (without batteries)		kg	250	300	320	360	380
Weight with batteries (maximum)			800	850	n.a.	n.a.	n.a.
Input / Output terminals			Cables input from bottom				
Handling			Base provided for fork-lift				
Storage and transport conditions			According to EN 62040-3				
Reference standards			EN 50171 - EN 62040-1 - EN62040-2 - EN62040-3				

POWER	kVA	60	80	100	125	160
Front panel		Liquid Cristal Display Touch-screen (optional)				
Voltage-free contact interface		Optional for signalisations / alarms				
Serial communication interface		Standard: RS232/USB Optional: RS485 (ModBus RTU protocol)				
Parallel configuration (optional)		Up to 5+1 (parallel redundant) Up to 6 (power parallel) ⁽¹⁾				

⁽¹⁾ For higher configurations contact the manufacturer

BLOCK DIAGRAM

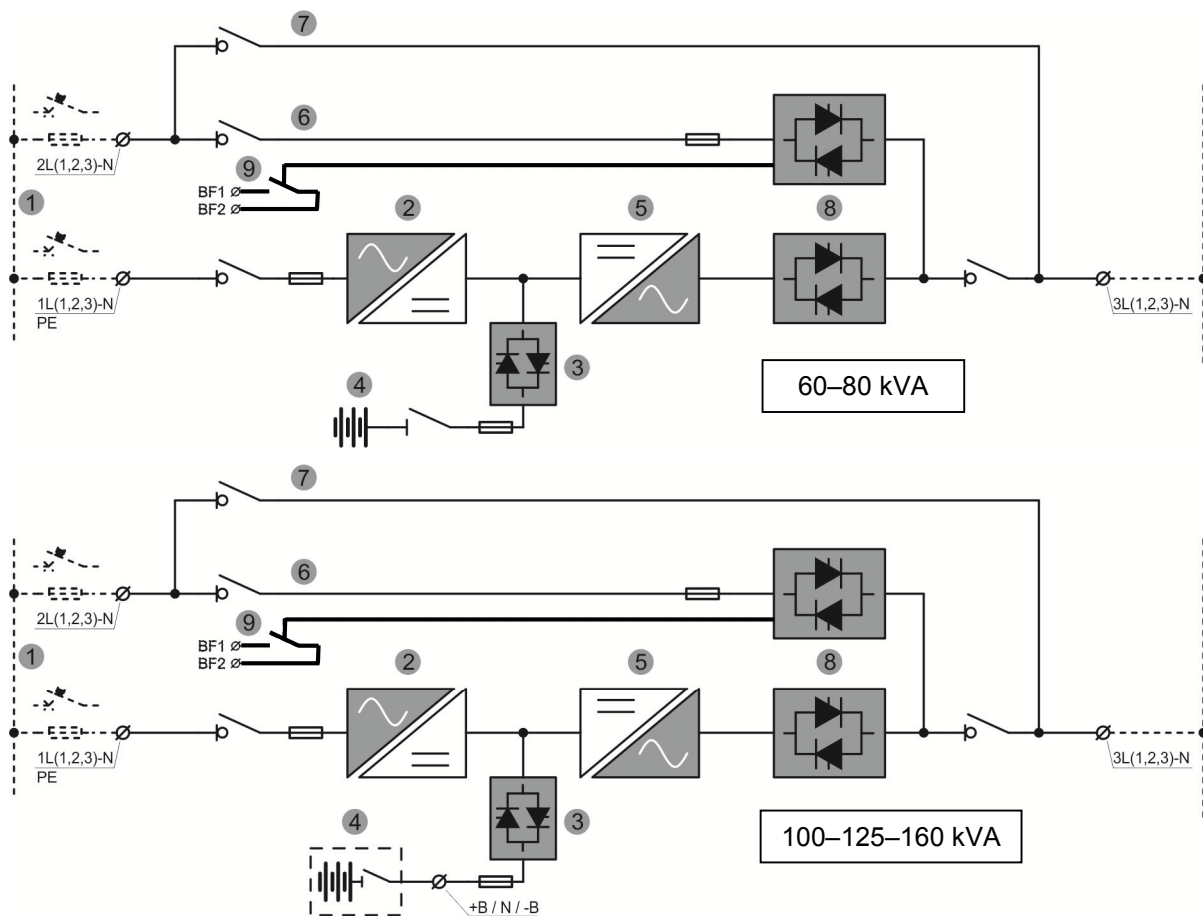

1. Separate mains input for rectifier and bypass
2. Rectifier battery-charger
3. Battery static switch
4. Internal battery for 60-80 kVA (Optional external cabinet) – External for 100÷160 kVA
5. Inverter
6. Emergency line (bypass)
7. Maintenance bypass line
8. Inverter (SSI) and bypass(SSB) static switch

RECTIFIER AND BATTERY CHARGER

POWER		kVA	60	80	100	125	160
Input			3-phase / 4-wire				
Rated input voltage		Vac	400				
Tolerance		%	-20 / +15				
Input frequency (selectable)		Hz	50 - 60				
Tolerance		%	+/- 10				
Input power factor			> 0,99				
Input current harmonic distortion (THDi) (at rated voltage and THDv < 0,5%)	@ 25% load	%	< 5				
	@ 50% load		< 4				
	@ 75% load		< 3				
	@ 100% load		< 3				
Output voltage static stability		%	+/- 1				
Output voltage ripple		%	< 1 (rms)				
Battery recharging characteristic			Intermittent charging with prevailing state of complete rest and control of the battery status IU (DIN 41773)				
Maximum battery recharging current		A	15	15	15	20	20
- at rated load							
- max current with DCM function			50	50	50	50	50
Rectifier bridge type			IGBT-based PFC				
Input protections			Fuses				
Rated current absorbed from mains @ Vnom (at rated load and battery charged)		A	91	122	152	190	243
Maximum current absorbed from mains at minimum voltage (at rated load and max recharging current)		A	136	175	212	267	334
Rectifier soft-start (walk-in)		s	5 ÷ 30 (programmable)				
Rectifier sequential start-up (hold-off)		s	1 ÷ 300 (programmable)				

BATTERY

POWER		kVA	60	80	100	125	160
Battery type (standard)			Sealed lead acid (VRLA - maintenance free)				
Number of cells			360 - 372				
Floating voltage at 25 °C	360 el.	Vdc	812				
	372 el.		840				
Minimum discharge voltage	360 el.	Vdc	620				
	372 el.		632				
Power drawn by the inverter (at rated load $\cos \varphi = 1$)		kW	61,9	82,5	103,1	128,9	164,9
Power drawn by the inverter (at rated load and minimum battery voltage)		A	100	133	166	208	266
Battery protection			Fuses				
Protection against reverse polarity			Provided as standard				
Protection against deep discharge			Provided as standard				
Battery test			Provided as standard				

INVERTER

POWER		kVA	60	80	100	125	160
Inverter bridge type			IGBT (High frequency PWM)				
Rated apparent power at $\cos \varphi = 1$		kVA	60	80	100	125	160
Rated active power at $\cos \varphi = 1$		kW	60	80	100	125	160
Rated active power according to EN 50171		kW	50	67	83	104	133
DC/AC efficiency	@ 25% load	%	96,0				
	@ 50% load		97,0				
	@ 75% load		97,0				
	@ 100% load		97,0				
Output			3-phase / 4-wire				
rated output voltage (selectable)		Vac	380 - 400 - 415				
Output voltage stability							
- Static (balanced load)		%	+/- 1				
- Static (unbalanced load)		%	+/- 2				
- Dynamic (load step 20%-100%-20%)		%	+/- 5				
- Output voltage recovery after load step		ms	< 20				
- Classification according to EN 62040-3			VFI-SS-111				
Phase angle accuracy							
- Balanced load		°	+/- 1				
- Unbalanced load (100% - 0% - 0%)		°	+/- 1				
Output frequency		Hz	50 - 60				
Output frequency stability							
- Internal clock (mains not present)		Hz	+/- 0,001				
- Inverter synchronized with mains		Hz	+/- 2 (other on request)				
- Maximum frequency slew rate		Hz/s	< 1				
Rated output current (@ 400 Vac)		A	87	115	144	180	231
Overload capability (@ EN 50171 rated active power)	>100...120%	min	Permanent				
	>120...150%	min	10 ⁽¹⁾				
	>150%	ms	100				
Short circuit current ⁽²⁾		A	265	330	400	490	640
Short circuit characteristic			Current limited with electronic protection Automatic stop after 5 seconds				
Output waveform			Sinusoidal				
Output voltage harmonic distortion THDv							
- With linear load		%	< 1				
- With non-linear load		%	< 5				
- According to EN 62040-3			Fully compliant				
Max crest factor without derating			3 : 1				

⁽¹⁾ For 160kVA Overload capability 10' >120%...130%, 5' >130...150%

⁽²⁾ Value referred to short-circuit mode IK1 - IK2 - IK3

BYPASS

Automatic bypass		Electronic thyristor switch
Input		3-phase / 4-wire
Protection		Fuses
Rated input voltage (selectable)	Vac	380 - 400 - 415
Tolerance (selectable)	%	+/- 10
Input frequency (selectable)	Hz	50 - 60
Tolerance (selectable)	%	+/- 10
Transfer mode		No-break
Inverter --> automatic bypass transfer		In case of: - Short-circuit - Battery discharged - Inverter test - Inverter failure
Automatic bypass --> inverter transfer		Automatic Block on bypass in case of 6 transfers in 2 minutes, local reset by display
Overload capability	%	150 continuously 1000 for 1 cycle
Manual bypass		- Electronically controlled - No-break assisted re-start procedure
Back-feed protection		NC contact for the control of an external device

SOFTWARE ENABLED FUNCTIONS

1. DIESEL MODE OPERATION
2. RECTIFIER WALK-IN TIME
3. RECTIFIER DELAY ON STARTUP (HOLD-OFF TIME)
4. DYNAMIC CHARGING MODE (DCM)
5. VFI / VFD (ECO) OPERATING MODE MANAGEMENT
6. FREQUENCY CONVERTER

OPTIONS

1. BATTERY TEMPERATURE VOLTAGE COMPENSATION
2. REMOTE STATUS / ALARMS CARD
3. SERIAL INTERFACE RS-485 (ModBus protocol RTU)
4. SNMP ADPTER
5. PARALLEL CARD INTERFACE KIT
6. LOAD-SYNC CARD INTERFACE KIT
7. ISOLATION TRANSFORMER
8. WALL MOUNTED FUSED SWITCH BOX
9. SPECIAL PAINT